

Challenger Lifts

INNOVATIVE LIFTING SOLUTIONS



Model#: 4030 Series

4-Post Closed Front Lift
30,000 lb. lifting capacity

**Available in General
Service and Alignment!**

30,000lb Heavy Duty 4-Post Lift (Closed Front)

Challenger Lifts' 4030 Series Heavy Duty 4-Post lift is built on a time-proven cable and cylinder design system using heavy-duty steel sheaves and cables.

These lifts feature a heavy-duty cylinder for optimal performance and minimal maintenance, durable non-skid louvered approach ramps, and built-in runway rail system provides versatility to add convenience options like rolling jacks and sliding oil drain pan (Sold Separately). Available in alignment and flat deck models and 3 lengths to accommodate wheelbases from 244.5" - 318.625"



**TIME TESTED
CABLE DRIVE**




**ALIGNMENT AND
FLAT DECK AVAILABLE**

Model Number	4030SFX	4030EFX	4030XFX	4030SAX	4030EAX	4030XAX
Lifting Capacity	30,000 lb. (13608kg)					
A Length Overall	308.125" (7826mm)	344.125" (8741mm)	380.125" (9655mm)	308.125" (7826mm)	344.125" (8741mm)	380.125" (9655mm)
B Width Overall	172.75" (4388mm)					
C Inside Columns	152" (3861mm)					
D Between Columns	246.125" (6252mm)	282.625" (7179mm)	318.625" (8093mm)	246.125" (6252mm)	282.625" (7179mm)	318.625" (8093mm)
E Height of Columns	92.25" (2343mm)					
F Height of Runways	8.5" (216mm)					
G Width of Runways	24" (610mm)					
H Width Between Runways (Min/Max)	46" - 52" (1168mm - 1321mm)					
Maximum Wheelbase ¹	244.5" (6210mm)	281" (7137mm)	317" (8052mm)	244.5" (6210mm)	281" (7137mm)	317" (8052mm)
Rise Height	71.75" (1822mm)					
Max 2 Wheel Alignment	N/A	N/A	N/A	219.5" (5575mm)	256" (6502mm)	292" (7419mm)
Motor	3HP					
Voltage (Single Phase Std.)	208v - 230v					
Speed of Rise	TBD					
Air Required	90 - 120 psi					
Min Recom. Bay Size	28' x 17'	31' x 17'	34' x 17'	28' x 17'	31' x 17'	34' x 17'

¹ Maximum wheelbase is based on a tire diameter of 30".
Standard lift colors are Red and Blue. Optional colors available.

Features & Benefits

- **ALI-Certified Cable-Driven 30K 4 Post!**
- Large heavy-duty steel sheaves and cables
- Time-proven cable and cylinder design system
- 71.75" rise height provides more work space underneath vehicles
- Heavy-duty cylinder for optimal performance and minimal maintenance
- Single point air actuated lock release disengages all column locks simultaneously
- Multiple locking positions for a variety of alignment and general service tasks
- Compatible with the industry's latest camera imaging alignment systems
- Available recessed heavy duty steel turnplates provide accurate readings
- Durable non-skid louvered approach ramps for positive vehicle traction and technician safety
- Built-in runway rail system provides versatility to add convenience options like rolling jacks and sliding oil drain pan (Sold Separately)

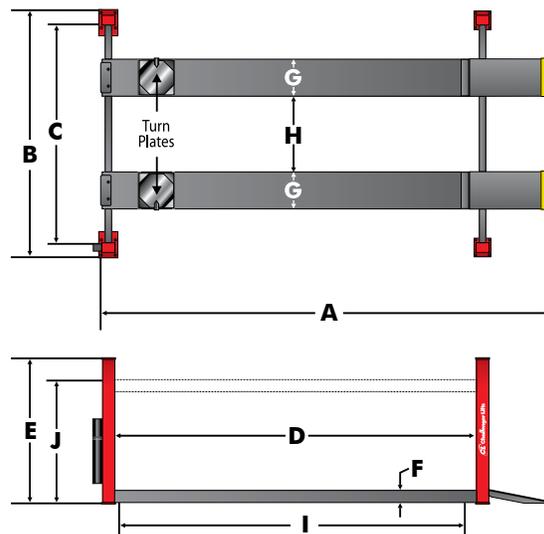

Challenger Lifts
INNOVATIVE LIFTING SOLUTIONS
challengerlifts.com

For more information, contact your Authorized Challenger Lifts Distributor:



CHALLENGER LIFTS, INC.
2311 South Park Rd.
Louisville, Kentucky 40219

Phone Toll-Free: 800-648-5438
502-625-0700
Fax: 502-625-0711
E-mail: sales@challengerlifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.