




# HEAVY DUTY SHOP PRESSES



Hand operated air valve is connected to a 54" air hose.



4-Way mountable air/hydraulic pump

Side-to-Side ram adjustments with locking capabilities.

**SP-75**  
75 Ton Capacity


Air Powered Ram Retract

Safety Guards Available



## Combines Speed & Precision


- **Speed**  
Designed to accelerate the ram to the load
- **Precision**  
Internal power system designed to eliminate ram over travel
- **Power Source**  
Manual or Air/Hydraulic models available

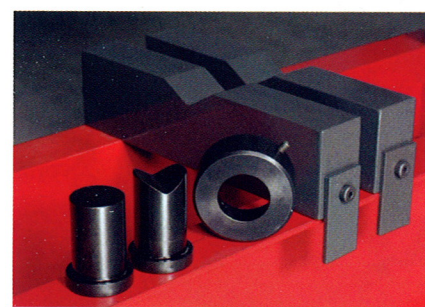

Accessory Kit:  
15<sup>3</sup>/<sub>4</sub>" V-Blocks & 2" Diameter Push Adapters


| SPECIFICATIONS  | SP-75                            |
|---|----------------------------------|
| Capacity  | 75 Tons                          |
| Power Source  | Air/Hydraulic                    |
| Stroke  | 13 <sup>1</sup> / <sub>8</sub> " |
| Horizontal Ram Travel   | 32"                              |
| Throat Width  | 50"                              |
| Inside Throat Depth   | 8"                               |
| Outside Throat Depth  | 14"                              |
| Required Air Pressure   | 120-200 PSI                      |
| Bolster Adj. Increments   | 6"                               |
| Vertical Throat Minimum   | 9 <sup>1</sup> / <sub>2</sub> "  |
| Vertical Throat Maximum   | 39 <sup>1</sup> / <sub>2</sub> " |
| Overall Depth   | 44"                              |
| Overall Width   | 78"                              |
| Overall Height  | 85"                              |
| Floor Space Dimensions  | 62" x 44"                        |
| Shipping Weight per Pair  | 1,845 lbs                        |
| Manufactured in USA<br>Specifications are subject to change without notice. |                                  |

**BSP-10**  
10 Ton Capacity

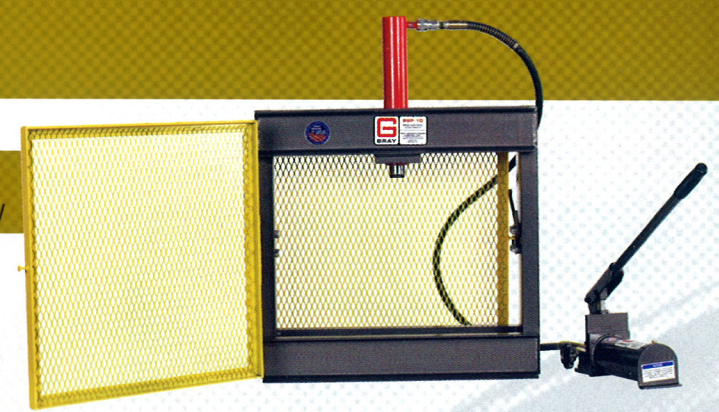

| SPECIFICATIONS  | BSP-10   |
|---|--|
| Capacity  | 20,000 lbs   |
| Cylinder Stroke   | 10"  |
| Weight  | 130 lbs  |
| Overall Foot Print  | 25 <sup>1</sup> / <sub>8</sub> " x 7 <sup>1</sup> / <sub>8</sub> " |
| Manufactured in USA<br>Specifications are subject to change without notice. |  |

**SP-10**  
10 Ton Capacity

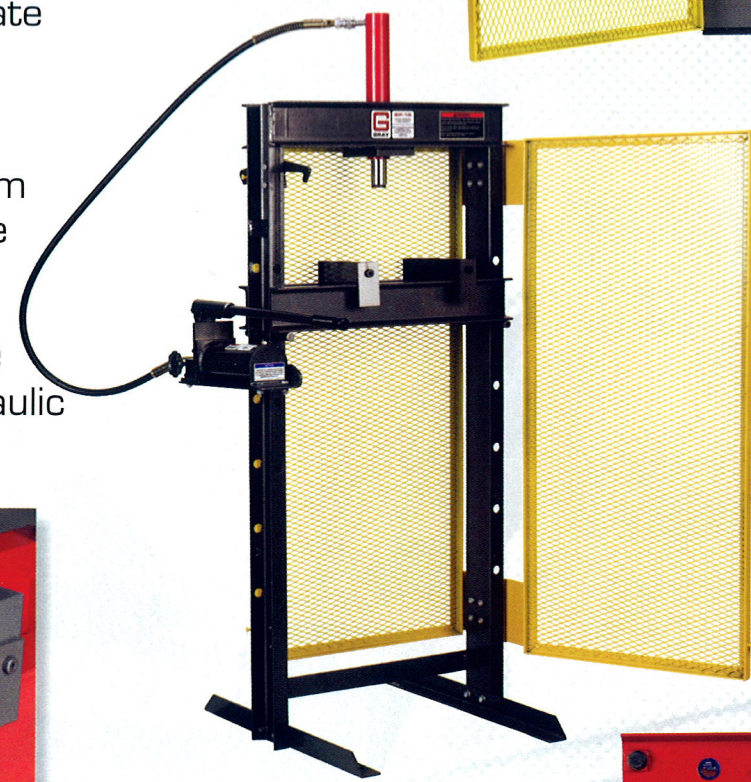

| SPECIFICATIONS  | SP-10                                  |
|---|--|
| Capacity  | 20,000 lbs                             |
| Cylinder Stroke   | 10"                                    |
| Weight  | 180 lbs                                |
| Adjustments   | 6" Increments                          |
| Overall Foot Print  | 25 <sup>1</sup> / <sub>8</sub> " x 28" |
| Manufactured in USA<br>Specifications are subject to change without notice. |  |

**SP-25**  
25 Ton Capacity



| SPECIFICATIONS  | SP-25   |
|---|---|
| Capacity  | 50,000 lbs  |
| Cylinder Stroke   | 6 <sup>1</sup> / <sub>4</sub> "                                     |
| Weight  | 510 lbs   |
| Adjustments   | 4 <sup>1</sup> / <sub>4</sub> " Increments                          |
| Overall Foot Print  | 40 <sup>1</sup> / <sub>2</sub> " x 70 <sup>3</sup> / <sub>8</sub> " |
| Manufactured in USA<br>Specifications are subject to change without notice. |   |

Models Shown with Optional Guards