

# AIR/HYDRAULIC TRUCK SERVICE LIFTS

- Unique QuickLift® Feature - internal design raises the ram to the load at a quicker rate of speed
- Low starting height of 8" allows for easy positioning and spotting underneath low profile vehicles
- Air ram retract utilizes shop air to reset the ram back to minimum starting height
- Field ready design makes it ideal for road service work



Gray Vehicle Support Stands shown in use (page 15).

## Black Armor Coating™

Protects the ram from rust and corrosion to extend longevity of product

## Anti-Corrosive System

The distinctive design of the internal system protects the hydraulic system to extend product life

SPECIFICATIONS	TSL-50
Capacity	50,000 lbs.
Minimum Start Height	8"
Maximum Lift Height	21"
Power Source	Air/Hydraulic
Required Air Pressure	90-200 PSI
Stroke	5 1/8"
Extension Screw Adjustment	4 7/8"
Frame Width	12"
Frame Length	20"
Wheel Diameter	8"
Handle Length	53"
Shipping Weight	124 lbs.

Manufactured in USA  
Specifications are subject to change without notice.


**TSL-50**  
50,000 lbs  
Capacity



**TSL-50LP**  
50,000 lbs Capacity

SPECIFICATIONS	TSL-50LP
Capacity	50,000 lbs
Maximum Air Pressure	200 PSI
Starting Height	8 9/16"
Starting Height w/Short Lift Pad Extension	11"
Starting Height w/Tall Lift Pad Extension	13 11/16"
Starting Height w/Short & Tall Lift Pad Extensions	16"
Lifting Height	13 5/8"
Lifting Height w/Short Lift Pad Extension	16 3/16"
Lifting Height w/Tall Lift Pad Extension	18 13/16"
Lifting Height w/Short & Tall Lift Pad Extensions	21 1/8"
Stroke	5 1/8"
Weight	120 lbs
Lift Pad Diameter	3 1/2"

Manufactured in USA  
Specifications are subject to change without notice.

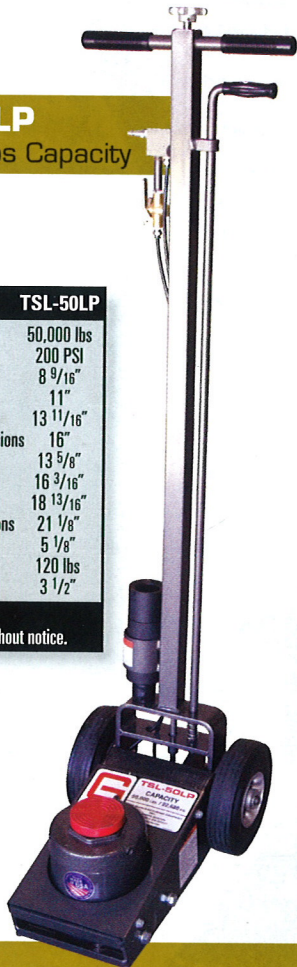

SPECIFICATIONS	TSL-70
Capacity	70,000 lbs.
Lift Pad Start Height	9 1/4"
Lift Pad Start Height with Adapter	11 7/8"
Power Stroke	5 1/8"
Screw Adjustment	5"
Maximum Lift Height	22"
Air Pressure Requirements	110-200 PSI
Length (Handle Horizontal)	71"
Width at Wheels	14 1/4"
Overall Height (Handle Vertical)	58 1/2"
Weight	146 lbs.

Manufactured in USA  
Specifications are subject to change without notice.



**TSL-70**  
70,000 lbs  
Capacity

SPECIFICATIONS	TSL-50S
Capacity	50,000 lbs.
Minimum Start Height	8"
Maximum Lift Height	21"
Power Source	Air/Hydraulic
Required Air Pressure	90-200 PSI
Stroke	5 1/8"
Extension Screw Adjustment	4 7/8"
Frame Width	12"
Frame Length	20"
Wheel Diameter	8"
Handle Length	23"
Shipping Weight	124 lbs.

Manufactured in USA  
Specifications are subject to change without notice.



**TSL-50S**  
50,000 lbs  
Capacity